



## GROUND FAULT CIRCUIT INTERRUPTER

# GFCI in HVAC Applications

[usa.siemens.com/gfci](https://usa.siemens.com/gfci)

With the revision of the 2020 National Electrical Code to protect more areas of the home, Siemens has expanded our GFCI product line, continuing to provide complete home safety for our customers. The NEC 2020 Section 210.8(F) enhances GFCI protection to outdoor outlets associated with HVAC units if the unit is supplied by a single phase branch circuit rated 150 volts or less to ground, rated 50A or less.

Exception No. 2 to NEC 210.8(F) in the 2020 and 2023 National Electrical Code has so far exempted listed HVAC equipment from the GFCI protection requirement. This exemption, issued via Tentative Interim Amendment (TIA) 23-3, will expire on September 1, 2026. Following the expiration date, GFCI protection will be required for listed HVAC installations.

To better serve these applications, Siemens now offers the "inbetween" amperage circuit breakers of ratings 25, 35, and 45 Amps in its 2-pole GFCI portfolio in addition to new GFCI ready load centers. These solutions provide fast and easy ways of installing GFCI protection when required by code.

### GFCI Breaker Features

- Available in 2-pole from 15 to 60A ratings
- Available in 10k, 22k, and 65kAIC ratings
- Includes a Self-Test as required by UL943 as an added safety feature
- Suitable for a variety of construction applications: HVAC, spas, hot tubs, kitchens, bathrooms, etc.
- Resists false tripping (shielded to prevent RF interference)
- Standard 1 inch per pole format with plug-in design
- cULus Listed
- Provides Class A (5mA) GFCI protection
- HACR and SWD rated

# SIEMENS

## Plug-in / Plug-on Ground-Fault Circuit Interrupters

| Breaker Type                              | Amp Rating | 10,000 A IR Catalog No. | 22,000 A IR Catalog No. | 65,000 A IR Catalog No. |
|-------------------------------------------|------------|-------------------------|-------------------------|-------------------------|
| <b>2-Pole 120/240V AC Plug-in</b>         |            |                         |                         |                         |
| QPFB/<br>QPHFB/<br>HQPFB                  | 15         | Q215GF                  | Q215GFH                 | Q215GFHH                |
|                                           | 20         | Q220GF                  | Q220GFH                 | Q220GFHH                |
|                                           | 25         | Q225GF                  | —                       | —                       |
|                                           | 30         | Q230GF                  | Q230GFH                 | Q230GFHH                |
| QPF/<br>QPHF                              | 35         | QF235A                  | —                       | —                       |
|                                           | 40         | QF240A                  | QF240AH                 | —                       |
|                                           | 45         | QF245A                  | —                       | —                       |
|                                           | 50         | QF250A                  | QF250AH                 | —                       |
|                                           | 60         | QF260A                  | QF260AH                 | —                       |
| <b>2-Pole 120/240V AC Plug-on Neutral</b> |            |                         |                         |                         |
| QPFBN                                     | 15         | Q215GFN                 | —                       | —                       |
|                                           | 20         | Q220GFN                 | —                       | —                       |
|                                           | 30         | Q230GFN                 | —                       | —                       |

## GFCI Ready Panels (factory installed GFCI breaker)

Main Lug with Aluminum Bus

Outdoor enclosure - NEMA Type 3R

| GFCI Amp Rating | Catalog No.         | Std. Pkg. | Dimensions (inches) |       |       |
|-----------------|---------------------|-----------|---------------------|-------|-------|
|                 |                     |           | H                   | W     | D     |
| 20              | W0204L1060G20 ①②③   | 1         | 8                   | 5 1/2 | 3 5/8 |
| 25              | W0204L1060G25 ①②③   | 1         | 8                   | 5 1/2 | 3 5/8 |
| 30              | W0204L1060G30 ①②③   | 1         | 8                   | 5 1/2 | 3 5/8 |
| 50              | W0408L1125SPA50 ④⑤⑥ | 1         | 12 1/4              | 6     | 4 1/4 |
| 60              | W0408L1125SPA60 ④⑤⑥ | 1         | 12 1/4              | 6     | 4 1/4 |

## 30A and below




2-Pole GFCI

## 35A and above



2-Pole GFCI

## 2-Pole Wiring Diagram

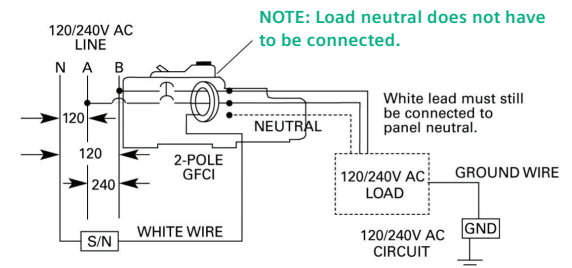

W0204L1060G20  
W0204L1060G25  
W0204L1060G30



W0408L1125SPA50  
W0408L1125SPA60

Prefer to build your own? Consider pairing a small circuit load center with the breaker and SPD of your choice!

## Small Circuit Load Centers

Main Lug with Aluminum Bus

Outdoor enclosure - NEMA Type 3R

| Catalog No.        | Std. Pkg. | Dimensions (inches) |       |       |
|--------------------|-----------|---------------------|-------|-------|
|                    |           | H                   | W     | D     |
| W0204ML1060 ①②③⑦   | 1         | 8                   | 5 1/2 | 3 5/8 |
| W0408ML1125 ①②③⑤   | 5         | 12 1/4              | 6     | 4 1/4 |
| W0408ML1125G ①②④⑤⑥ | 1         | 12 1/4              | 6     | 4 1/4 |



QSPD2A035B

For more information on the Surge Protection product line, see Section 1 and Section 10 of the Speedfax catalog at [usa.siemens.com/speedfax](http://usa.siemens.com/speedfax).

- ① cULus Listed.
- ② Suitable for use as service equipment. Check local codes and restrictions.
- ③ W0204L1060G20 provided with factory installed Q220GF and ground bar.  
W0204L1060G25 provided with factory installed Q225GF and ground bar.  
W0204L1060G30 provided with factory installed Q230GF and ground bar.
- ④ Will not accommodate a 2-pole circuit breaker with shunt trip.
- ⑤ Can accommodate 2-pole GFCI breaker up to 50A. For 2-pole 60A GFCI, a restriction of #6 wire applies due to wire bend space of the enclosure.
- ⑥ W0408ML1125G provided with factory installed ground bar.  
W0408L1125SPA50 provided with factory installed QF250A and ground bar.  
W0408L1125SPA60 provided with factory installed QF260A and ground bar.
- ⑦ For 2-pole GFCI, accommodates types QPFB, QPHFB, HQPFB, QEB, QEHB, HQEB.

## Legal Manufacturer

Siemens Industry, Inc.  
3617 Parkway Ln.  
Peachtree Corners, GA 30092  
United States of America  
Telephone: +1 (800) 333-7421  
[www.usa.siemens.com/gfci](http://www.usa.siemens.com/gfci)  
Order No. RPFL-GFCIT-0226  
© 02.2026, Siemens Industry, Inc.

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.

**SIEMENS**